

RL-TR-96-113
In-House Report
May 1996



CALCULATION OF THE DERIVATIVE OF THE PARABOLIC CYLINDER FUNCTION

Robert A. Shore, Thorkild B. Hansen

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED.

19970321 094

Rome Laboratory
Air Force Materiel Command
Rome, New York

DTIC QUALITY INSPECTED 3

This report has been reviewed by the Rome Laboratory Public Affairs Office (PA) and is releasable to the National Technical Information Service (NTIS). At NTIS it will be releasable to the general public, including foreign nations.


RL-TR-96-113 has been reviewed and is approved for publication.

APPROVED:



DANIEL J. JACAVANCO, Chief
Antennas and Components Division
Electromagnetics & Reliability Directorate

FOR THE COMMANDER:



ROBERT V. MCGAHAN
Acting Director
Electromagnetics & Reliability Directorate

If your address has changed or if you wish to be removed from the Rome Laboratory mailing list, or if the addressee is no longer employed by your organization, please notify Rome Laboratory/ERAA, Hanscom AFB, MA 01731. This will assist us in maintaining a current mailing list.

Do not return copies of this report unless contractual obligations or notices on a specific document require that it be returned.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE May 1996	3. REPORT TYPE AND DATES COVERED In-House Apr 95-Dec 95		
4. TITLE AND SUBTITLE Calculation of the Derivative of the Parabolic Cylinder Function		5. FUNDING NUMBERS PE 61102F PR 2304 TA I3 WU 02		
6. AUTHOR(S) Robert A. Shore, Thorkild B. Hansen*				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Rome Laboratory/ERAA 31 Grenier St Hanscom AFB, MA 01731-3010		8. PERFORMING ORGANIZATION REPORT NUMBER RL-TR-96-113		
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES)		10. SPONSORING / MONITORING AGENCY REPORT NUMBER		
11. SUPPLEMENTARY NOTES Rome Laboratory Project Engineer: Robert A. Shore/ERAA (617)377-2058 *Subcontractor for CUBRC				
12a. DISTRIBUTION / AVAILABILITY STATEMENT Approved for public release; distribution unlimited.		12b. DISTRIBUTION CODE		
13. ABSTRACT (Maximum 200 words) The numerical evaluation of the derivative of the parabolic cylinder function, $D'_p(z)$, is described for the argument $z = x \exp(-i\pi/4)$ and order $p = 1/2 + iy$, with x and y real. The case is needed for calculating the currents excited on a parabolic cylinder by a transverse electric plane wave, and for calculating the scattered far field pattern. Numerically accurate and efficient expressions for $D'_p(z)$ are presented for each of five regions into which the xy plane is divided.				
14. SUBJECT TERMS Parabolic cylinder function Derivative Numerical calculation			15. NUMBER OF PAGES 14	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT SAR	

Contents

1	Introduction	1
2	Numerical Evaluation of $D'_p(z)$	1
3	Numerical Results	6
4	Conclusion	6

Illustrations

1	Definition of Regions A-E [6].	3
---	--	---

Tables

1	Values of $D'_p(z)$ at selected points in Figure 1: $z = xe^{-i\pi/4}$ and $p = -1/2 + iy$. .	7
---	--	---

Acknowledgments

The authors thank Dr. John L. Blanchard for helpful conversations during the course of this work, and Prof. Warren F. Perger for supplying the complex gamma function subroutine used in the calculations. This work was supported by the Air Force Office of Scientific Research, Bolling AFB, DC.

Calculation of the Derivative of the Parabolic Cylinder Function

1 Introduction

This report describes the numerical evaluation of the derivative of the parabolic cylinder function, $D'_p(z)$, where $D_p(z)$ is the parabolic cylinder function defined by Whittaker and Watson [1, pp.347-349]. (See also [2, Ch.19], [3, Ch.46], and [4].) The numerical evaluation is for complex argument $z = xe^{-i\pi/4}$, and complex order $p = -1/2 + iy$, x and y real. This case is needed to calculate the currents excited on a perfectly conducting parabolic cylinder by a transverse electric (TE) plane wave, and the corresponding scattered far field pattern [5, Eqs. (7.47) and (7.48)]. This is the motivation for this report, designed to complement the valuable communication of Blanchard and Newman [6] which treats the numerical evaluation of the same case of the parabolic cylinder function itself, needed for the corresponding transverse magnetic (TM) scattering calculations [5, Eqs.(7.12) and (7.13)].

2 Numerical Evaluation of $D'_p(z)$

We present expansions for $D'_p(z)$ for $z = x\alpha$, $p = -1/2 + iy$, x and y real, and $\alpha = e^{-i\pi/4}$. The discussion closely parallels that of Blanchard and Newman [6]. We adopt their division of the xy plane into five regions, denoted Regions A-E, as shown in Figure 1, and give numerically useful expressions for calculating $D'_p(z)$ for each of these regions.

Region A: $|x| \leq 5$, $|y| \leq 4$.

In this region, the exact power series for $D'_p(z)$ can be used, obtained by differentiating the

Received for publication 23 May 1996

exact power series of $D_p(z)$ given in [6]:

$$D'_p(z) = -\frac{2^{-(p+5)/2}e^{-z^2/4}}{\Gamma(-p)} \left\{ \Gamma\left(\frac{1}{2} - \frac{p}{2}\right) \left[4 - p(\sqrt{2}z)^2 \right. \right. \\ \left. \left. + \sum_{k=2}^{\infty} \frac{(\frac{1}{2} - \frac{p}{2}) \cdots (k-2 + \frac{1}{2} - \frac{p}{2})}{(2k)!} [2k - 2(p+1)] (\sqrt{2}z)^{2k} \right] \right. \\ \left. - \Gamma\left(-\frac{p}{2}\right) \left[(-2p-1)(\sqrt{2}z) + \sum_{k=1}^{\infty} \frac{(-\frac{p}{2}) \cdots (k-1 - \frac{p}{2})}{(2k+1)!} [2k+1 - 2(p+1)] (\sqrt{2}z)^{2k+1} \right] \right\} \quad (1)$$

for $p \neq 0, 1, 2, \dots$, and where Γ is the gamma function [2, Ch.6]. On a computer with 16 digit double precision, this expression gives at least 6 digit accuracy in Region A if the summations are continued until the terms decrease below $1 \cdot 10^{-10}$ in magnitude. The gamma function of complex argument is also computed in double precision, using the relations (2) and (3), derived using the recurrence, reflection, and duplication formulas for the gamma function [2, Ch.6], to obtain $\Gamma(-p)$ and $\Gamma(1/2 - p/2)$ from $\Gamma(-p/2)$:

$$\Gamma(-p) = \left(\frac{\pi}{2}\right)^{1/2} 2^{-(p+1/2)} \frac{1}{\cos\left(\frac{\pi p}{2}\right)} \frac{\Gamma\left(-\frac{p}{2}\right)}{\Gamma^*\left(-\frac{p}{2}\right)} \quad (2)$$

$$\Gamma\left(\frac{1}{2} - \frac{p}{2}\right) = \frac{\pi}{\cos\left(\frac{\pi p}{2}\right)} \frac{1}{\Gamma^*\left(-\frac{p}{2}\right)} \quad (3)$$

where $*$ denotes complex conjugation.

Although the exact power series (1) for $D'_p(z)$ is absolutely convergent for all x and y , the terms of the sums grow very large before they become small if $|x|$ or $|y|$ is large, just as happens for $D_p(z)$ itself [6]. The accuracy of (1) is then degraded by the process of subtracting large numbers of comparable magnitude, and also eventually by the generation of numbers that overflow the dynamic range of the computer.

Region B: $x \geq 5$, $|y| \leq 2$.

In this region, the asymptotic series

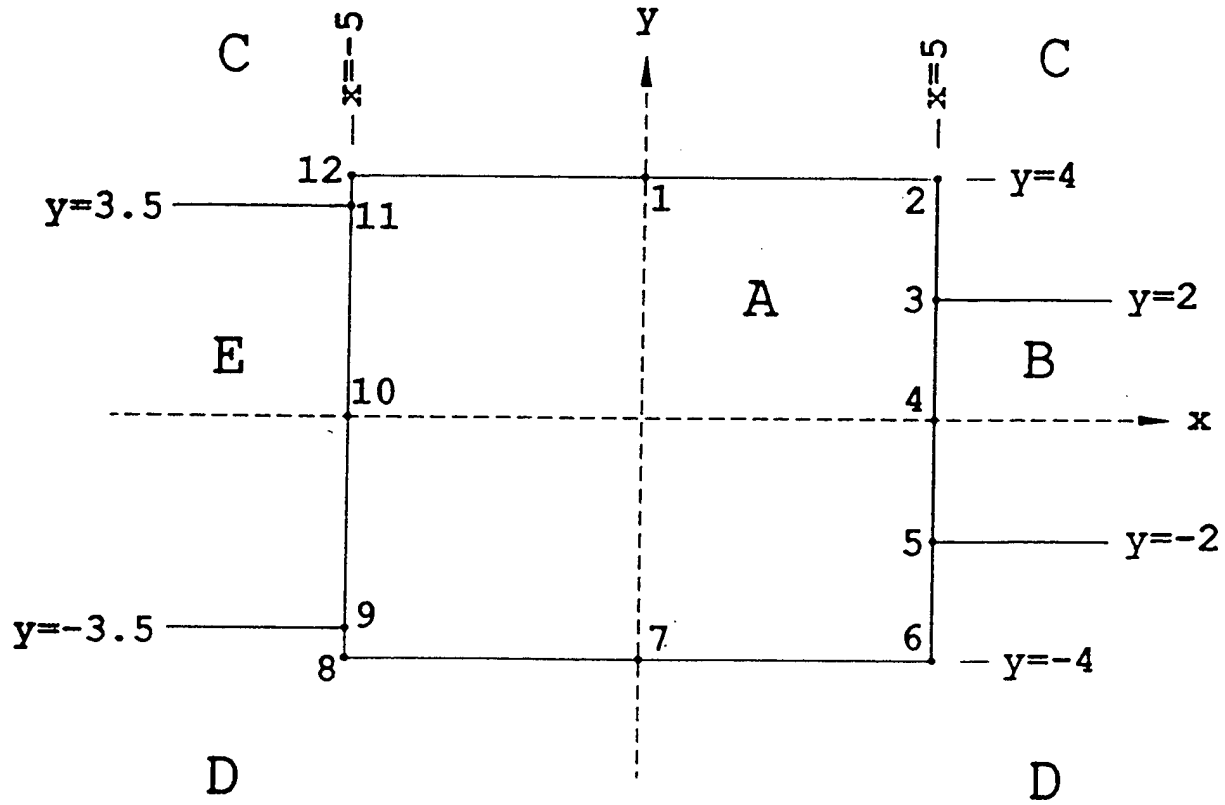


Figure 1: Definition of Regions A-E [6].

$$D'_p(z) \sim -\frac{e^{-z^2/4} z^{p+1}}{2} \left[1 - \frac{p(p+3)}{1!(2z^2)^1} + \frac{p(p-1)(p-2)(p+5)}{2!(2z^2)^2} - \frac{p(p-1)(p-2)(p-3)(p-4)(p+7)}{3!(2z^2)^3} + \dots \right] \quad (4)$$

is used. This series can be obtained by differentiating the asymptotic expansion for $D_p(z)$ given in [1, p.347] or, more easily, by using the recursion formula [2, Eq. 19.6.3]:

$$D'_p(z) = \frac{1}{2} [pD_{p-1}(z) - D_{p+1}(z)]. \quad (5)$$

The expansion (4) is valid for all p and for $|\arg(z)| < 3\pi/4$ when $p \ll z$ [1, p.347]. The summation in (4) is continued until the terms start to increase in magnitude. At least five significant figure accuracy can be obtained.

Region C: All x , and $y \geq 2$ except in regions A and E.

In this region we use a large order asymptotic expansion obtained by Olver [7]: ¹

$$D'_{-\frac{1}{2}+iy}(x\alpha) \sim -2^{-1/2}\mu'g(\mu'\alpha^*)(t'^2+1)^{1/4}e^{-i\mu'^2\xi}\sum_{s=0}^{\infty}\frac{i^s\tilde{v}_s(t')}{(R^3\mu'^2)^s} \quad (6)$$

where

$$\begin{aligned} \mu' &= \sqrt{2y}, \quad \mu' > 0, \\ t' &= \frac{x}{\sqrt{2}\mu'}, \\ R &= (t'^2+1)^{1/2}, \\ g(w) &= 2^{-(1+w^2)/4}e^{-w^2/4}w^{-(1-w^2)/2}\left[1+\sum_{s=0}^{\infty}\frac{g_{2s+1}}{w^{4s+2}}\right]^{-1}, \\ g_1 &= \frac{1}{24}, \quad g_3 = -\frac{2021}{207360}, \quad g_5 = \frac{5149591}{418037760}, \\ \xi &= \frac{i\pi}{4} - \frac{\text{sgn}(t')}{2} [|t'|R + \ln(|t'|+R)], \quad \text{sgn}(t') = \frac{t'}{|t'|}, \\ \tilde{v}_0 &= 1, \quad \tilde{v}_1 = -\frac{t'^3-6t'}{24}, \quad \tilde{v}_2 = -\frac{15t'^4+327t'^2-143}{1152}, \\ \tilde{v}_3 &= \frac{4042t'^9+18189t'^7+36387t'^5+238425t'^3-259290t'}{414720}. \end{aligned}$$

The terms given here give at least four significant figure accuracy, with the accuracy improving as y increases. Additional terms in the expansion can be obtained using algorithms given by Olver [7].

Region D: All x , and $y \leq -2$ except Regions A and E.

In this region we use the following large order asymptotic expansion obtained by Olver [7]: ²

$$\begin{aligned} D'_{-\frac{1}{2}+iy}(x\alpha) &\sim i\left(\frac{\pi}{2}\right)^{1/2}\mu'^{2/3}\frac{g(\mu'\alpha)}{\Phi}\left\{\frac{[Ai(-\mu'^{4/3}\zeta)-iBi(-\mu'^{4/3}\zeta)]}{\mu'^{4/3}}\sum_{s=0}^{\infty}(-1)^s\frac{C_s}{\mu'^{4s}}\right. \\ &\quad \left.-[Ai'(-\mu'^{4/3}\zeta)-iBi'(-\mu'^{4/3}\zeta)]\sum_{s=0}^{\infty}(-1)^s\frac{D_s}{\mu'^{4s}}\right\}, \quad x \geq 0 \end{aligned} \quad (7)$$

¹Equation (6) is obtained starting with [7, Eq.(4.13)], identifying μ with $\sqrt{2y}e^{i\pi/4}$, t with $-ix/(2\sqrt{y})$, and using [7, Eqs.(3.4), (11.6), (11.7), (11.8), (6.1), (4.12), (4.14), (4.16), and Fig. (2b)]. See also [6, Eq.(6)] and [8, Sect. 12.6.5].

²Equation (7) is obtained starting with [7, Eq.(8.15)], identifying μ with $2\sqrt{|y|}e^{-i\pi/4}$, t with $x/(2\sqrt{|y|})$, using [7, Eqs. (8.16), (7.4), (11.21), (8.18), (8.19), (4.14), (4.16), (8.13)], and [2, Eq. (10.4.9)]. Equation (8) is similarly obtained starting again with [7, Eq.(8.15)], letting $\mu \rightarrow \mu^{i\pi}$, and using [7, Eq.(5.24)]. See also [6, Eqs.(7) and (8)]. For general background on these expansions see [9, Ch.11].

$$D'_{-\frac{1}{2}+iy}(x\alpha) \sim (2\pi)^{1/2} \mu'^{2/3} e^{\pi\mu'^2/2} \frac{g(\mu'\alpha)}{\Phi} \left\{ \frac{-Ai(-\mu'^{4/3}\zeta)}{\mu'^{4/3}} \sum_{s=0}^{\infty} (-1)^s \frac{C_s}{\mu'^{4s}} \right. \\ \left. + Ai'(-\mu'^{4/3}\zeta) \sum_{s=0}^{\infty} (-1)^s \frac{D_s}{\mu'^{4s}} \right\}, \quad x \leq 0 \quad (8)$$

where Ai, Bi, Ai' , and Bi' are the Airy functions and their derivatives [2, Sect. 10.4], and $g(\mu'\alpha)$ is defined as for Region C. The other quantities are defined by

$$\mu' = \sqrt{2|y|},$$

$$t = \frac{|x|}{\sqrt{2}\mu'},$$

$$\frac{4}{3}\zeta^{3/2} = t(t^2 - 1)^{1/2} - \ln[t + (t^2 - 1)^{1/2}], \quad t \geq 1, \quad (\zeta \geq 0),$$

$$\frac{4}{3}(-\zeta)^{3/2} = \arccos(t) - t(t^2 - 1)^{1/2}, \quad -1 < t \leq 1, \quad (\zeta \leq 0),$$

$$\Phi = \left(\frac{\zeta}{t^2 - 1} \right)^{1/4},$$

$$C_s = -\frac{1}{(t^2 - 1)^{3s+1}} \Phi^2 \sum_{m=0}^{2s+1} b_m \Phi^{-6m} v_{2s-m+1}(t),$$

$$D_0 = 1, \quad D_s = -\frac{1}{(t^2 - 1)^{3s}} \sum_{m=0}^{2s} a_m \Phi^{-6m} v_{2s-m}(t),$$

$$v_0(t) = 1, \quad v_1(t) = \frac{t^3 + 6t}{24}, \quad v_2(t) = \frac{15t^4 - 327t^2 - 143}{1152},$$

$$v_3(t) = \frac{-4042t^9 + 18189t^7 - 36387t^5 + 238425t^3 + 259290t}{414720},$$

$$a_0 = 1, \quad a_m = \frac{(2m+1)(2m+3) \cdots (6m-1)}{m!(144)^m}, \quad b_m = -\frac{6m+1}{6m-1} a_m.$$

For $|t - 1| < 0.25$, Φ and ζ should be computed by the expressions given in [6], while for $|t - 1| < 0.05$, the following expansions, obtained using Mathematica, should be used for C_0 , C_1 , and D_1 :

$$\delta = t - 1$$

$$C_0 = -\frac{\Phi^2}{t+1} \left(\frac{1}{5} + \frac{3}{25}\delta + \frac{97}{2250}\delta^2 - \frac{173}{385000}\delta^3 + \cdots \right),$$

$$C_1 = \frac{\Phi^2}{(t+1)^4} \left(\frac{88579}{462000} + \frac{88579}{220000}\delta + \frac{11626038701}{22702680000}\delta^2 + \frac{1480656484897}{48243195000000}\delta^3 + \cdots \right),$$

$$D_1 = \frac{1}{(t+1)^3} \left(\frac{2041}{25200} + \frac{48577}{2772000}\delta + \frac{279481}{840840000}\delta^2 - \frac{21114659}{227026800000}\delta^3 + \dots \right),$$

The terms given here give at least four significant figure accuracy for $D'_{-1/2+iy}(x\alpha)$ in Region D.

Region E: $x \leq -5$, $-3.5 \leq y \leq 3.5$.

In this region we use the relation, valid for all z and p , obtained from [1, Sect. 16.52]:

$$D'_p(z) = -e^{p\pi i} D'_p(-z) - \frac{i\sqrt{2\pi}}{\Gamma(-p)} e^{(p+1)\pi i/2} D'_{-p-1}(-iz) \quad (9)$$

For $p = -1/2 + iy$ and $z = xe^{-i\pi/4}$,

$$D'_p(z) = -e^{p\pi i} D'_p(-z) - \frac{i\sqrt{2\pi}}{\Gamma(-p)} e^{(p+1)\pi i/2} D'^*_p(-z) \quad (10)$$

where $D'_p(-z)$ is calculated as above for Regions B, C, or D.

3 Numerical Results

To illustrate the accuracy of the expansions we have presented, in Table 1 we compare the results obtained with the expansions for Regions B-E with the Region A results for 12 points on the perimeter of Region A (see Figure 1), corresponding to the results given by Blanchard and Newman [6] for the parabolic cylinder function itself. Table 1 gives the values of x and y , the region whose expansion was used in the calculation, the calculated value of $D'_p(z)$, and the number of significant digits. The exact power series results for Region A have been checked with Mathematica and are correct to the number of figures shown.

4 Conclusion

In this report we have presented numerically useful expressions for calculating the derivative of the parabolic cylinder function, $D'_p(z)$, for the special case $p = -1/2 + iy$ and $z = xe^{-i\pi/4}$. This case is needed for calculating the currents excited on a perfectly conducting parabolic cylinder by a TE plane wave, and for calculating the scattered far field pattern.

Table 1: Values of $D'_p(z)$ at selected points in Figure 1: $z = xe^{-i\pi/4}$ and $p = -1/2 + iy$

Point	x	y	Region	$D'_p(z)$	Significant Digits
1	0	4	A	-0.214019E+02 - i0.867551E+01	6
1	0	4	C	-0.214038E+02 - i0.867624E+01	4.1
2	5	4	A	-0.292821E+02 - i0.586851E+00	6
2	5	4	C	-0.292820E+02 - i0.586872E+00	4.7
3	5	2	A	0.557884E+01 - i0.146969E+01	6
3	5	2	B	0.557885E+01 - i0.146966E+01	5.5
3	5	2	C	0.557886E+01 - i0.146962E+01	5.2
4	5	0	A	-0.103126E+01 + i0.437434E+00	6
4	5	0	B	-0.103126E+01 + i0.437433E+00	6
5	5	-2	A	0.197734E+00 - i0.775546E-01	6
5	5	-2	B	0.197733E+00 - i0.775537E-01	5
5	5	-2	D	0.197735E+00 - i0.775577E-01	4.5
6	5	-4	A	-0.384484E-01 + i0.378112E-02	6
6	5	-4	D	-0.384484E-01 + i0.378114E-02	5.7
7	0	-4	A	-0.214019E+02 + i0.867551E+01	6
7	0	-4	D	-0.214033E+02 + i0.867600E+01	4.3
8	-5	-4	A	0.581438E+04 - i0.235691E+04	6
8	-5	-4	D	0.581437E+04 - i0.235691E+04	6
9	-5	-3.5	A	0.424382E+04 - i0.236275E+03	6
9	-5	-3.5	D	0.424382E+04 - i0.236275E+03	6
9	-5	-3.5	E	0.424382E+04 - i0.236275E+03	6
10	-5	0	A	-0.190613E+01 - i0.437434E+00	6
10	-5	0	E	-0.190613E+01 - i0.437433E+00	6
11	-5	3.5	A	-0.112470E+02 - i0.159690E+02	6
11	-5	3.5	C	-0.112468E+02 - i0.159688E+02	5.7
11	-5	3.5	E	-0.112470E+02 - i0.159690E+02	6
12	-5	4	A	-0.214258E+02 - i0.199681E+02	6
12	-5	4	C	-0.214258E+02 - i0.199680E+02	6

References

- [1] E.T. Whittaker and G.N. Watson, (1958) *A Course of Modern Analysis*, 4th Ed., Cambridge, U.K.: Cambridge University Press
- [2] M. Abramowitz and I.A. Stegun, eds., (1970) *Handbook of Mathematical Functions*, 9th Printing, New York: Dover Publications, Ch. 19.
- [3] J. Spanier and K.B. Oldham, (1987) *An Atlas of Functions*, Washington: Hemisphere Publishing Co., Ch. 46.
- [4] C.J.P. Miller, (1955) *Tables of Weber Parabolic Cylinder Functions*, London, U.K.: H.M. Stationery Office
- [5] J.J. Bowman, T.B.A. Senior, and P.L.E. Uslenghi, eds. (1987) *Electromagnetic and Acoustic Scattering by Simple Shapes*, Revised Printing, New York: Hemisphere Publishing Co.
- [6] J.L. Blanchard and E.H. Newman, (1989) Numerical Evaluation of Parabolic Cylinder Functions, *IEEE Trans. Antennas Propagat.*, **37**:519-523. (The following misprints should be noted: In the expression for $g(w)$ following Eq.(6), the exponent of w should be $-(1 - w^2)/2$; in Eq.(8), $e^{(\pi/4)i}$ should be $e^{-(\pi/4)i}$; following Eq.(9), $z = xe^{-(\pi/4)i}$ and in Eq.(10), $e^{-((p+1)/2)\pi i}$ should be $e^{+(p+1)/2)\pi i}$.)
- [7] F.W.J. Olver, (1959) Uniform Asymptotic Expansions for Weber Parabolic Cylinder Functions of Large Orders, *J. Research NBS*, **63B**, 2:131-169
- [8] C.E. Pearson, ed. (1983) *Handbook of Applied Mathematics*, 2nd Ed., New York: Van Nostrand Reinhold
- [9] F.W.J. Olver, (1974) *Asymptotics and Special Functions*, New York: Academic Press

***MISSION
OF
ROME LABORATORY***

Mission. The mission of Rome Laboratory is to advance the science and technologies of command, control, communications and intelligence and to transition them into systems to meet customer needs. To achieve this, Rome Lab:

- a. Conducts vigorous research, development and test programs in all applicable technologies;
- b. Transitions technology to current and future systems to improve operational capability, readiness, and supportability;
- c. Provides a full range of technical support to Air Force Materiel Command product centers and other Air Force organizations;
- d. Promotes transfer of technology to the private sector;
- e. Maintains leading edge technological expertise in the areas of surveillance, communications, command and control, intelligence, reliability science, electro-magnetic technology, photonics, signal processing, and computational science.

The thrust areas of technical competence include: Surveillance, Communications, Command and Control, Intelligence, Signal Processing, Computer Science and Technology, Electromagnetic Technology, Photonics and Reliability Sciences.